


Dixi

The **Dixi** is one of the **pilot-operated gas pressure regulators** designed and manufactured by Pietro Fiorentini. This device is suitable for use with previously filtered non-corrosive gases, and it is mainly used for medium and low pressure natural gas distribution networks. According to the European Standard EN 334, it is classified as **Fail Close**.



Medium / small
industry

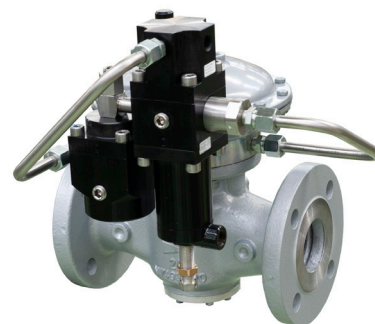

District stations

Features	Values
Design pressure* (PS ¹ / DP ²)	up to 1.6 MPa up to 16 barg
Ambient temperature* (TS ¹)	from -20 °C to +60 °C from -4 °F to +140 °F
Inlet gas temperature*	from -20 °C to +60 °C from -4 °F to +140 °F
Inlet pressure (MAOP / p _{umax} ¹)	from 0.05 to 1.6 MPa from 0.5 to 16 barg
Range of downstream pressure (Wd ¹)	from 0.0007 to 0.6 MPa from 0.007 to 6 barg
Available accessories	LA Slam shut, opening indicator
Minimum operating differential pressure (Δp _{min} ¹)	0.01 MPa 0.1 barg
Accuracy class (AC ¹)	up to 2.5 up to 1% absolute (depending on working conditions)
Lock-up pressure class (SG ¹)	up to 10
Nominal size (DN ^{1,2})	DN 25 1"; DN 40 1" 1/2; DN 50 2";
Connections	Class 150 RF according to ASME B16.5 and PN16, 25 according to ISO 7005

(¹) according to EN334 standard

(²) according to ISO 23555-1 standard

(*) NOTE: Different functional features and/or extended temperature ranges may be available on request. Stated inlet gas temperature range is the maximum for which the equipment's full performance, including accuracy is guaranteed. Product may have a different pressure or temperature ranges according to the version and/or installed accessories.

Table 1 Features

Materials and Approvals

Part	Material
Body	Cast steel ASTM A216 WCB for all sizes Ductile cast iron GS 400-18 ISO 1083
Heads	Die cast aluminium EN AC 43500
Seat	Stainless steel
Diaphragm	Rubberized canvas
O-rings	Nitrile Rubber
Compression fittings	According to DIN 2353 in zinc-plated carbon steel. Stainless steel on request

NOTE: The materials indicated above refer to the standard models. Different materials can be provided according to specific needs.

Table 2 Materials

The **Dixi** regulator is designed according to the European standard EN 334. The regulator reacts in closing (Fail Close) according to EN 334. The product is certified according to European Directive 2014/68/EU (PED). Leakage class: bubble tight, better than VIII according to ANSI/FCI 70-3.



EN 334



PED-CE

Dixi competitive advantages



Compact and simple design



High accuracy



1:500 High turn-down ratio



Fail Close plug and seat regulator



Built-in pilot filter



Top Entry



Easy maintenance



In-build accessories



Balanced type



Biomethane compatible and 10% Hydrogen blending compatible. Higher blending available on request